



MQ 156 Executive

The ergonomic choice for offices

The MQ156E offers brightness which guarantees a perfect picture even in well-lit rooms. The 15" display area corresponds to 17" on a CRT monitor, making it an excellent choice for an office setting. The MQ156E's housing comes in a metallic colour as standard.



Ergonomics

Thanks to MultiQ's patented PURETECH® technology, we have brought electrical emissions down to 96% below TCO'99 – a highly stringent environmental standard. With the exception of touch screens and MQ122E POS, all MultiQ monitors are equipped with PURETECH®.



Durability

A monitor can be a highly vulnerable piece of equipment, particularly in a public setting where lots of people pass by. MultiQ monitors have housings of aluminum instead of plastic, plus a protective glass in front of the sensitive picture panel. The antireflectioncoated glass can be easily wiped using ordinary window cleaner.

Design

A monitor no longer needs to be bulky and drab. What distinguishes MultiQ from other flat monitors is its elegant but subdued appearance, for which MultiQ has won the Excellent Swedish Design award.



Custom Design

Just think how nice it would be if your monitor could fit in with the rest of your office or workplace. You might want it to blend in with the surrounding colours or serve as a graceful contrast. We can adapt our monitors to your colour, wiring or mounting specifications. Call us for an offer, or read more about our options at www.multiQ.com


multiQ
Custom design flat monitors



Technical specifications MQ 156 Executive (Part no FPD100122)

R7B

Active Picture Size	15" (38 cm)	Power consumption	Normal 30 W
Active Picture Area	304.1 mm (H) x 228.1 mm (V)		Stand-by <4 W
Resolution	1024 x 768, XGA	Temperature	0-40°C
Luminance output	250 cd/m2 (typ.)	Storage temperature	-10-60°C
Contrast ratio	500:1 (typ.)	Approvals	CE, TÜV/GS, UL, FCC
Response time	16 ms typ. (Tr+Tf)		
Plug & Play	DDC1/2B	Dimensions (WxHxD)	386 x 373 x 55 (160) mm
Viewing angle V/H	(CR 10:1) H: -70° ~ 70° (Typ) (CR 10:1) V: -60° ~ 65° (Typ)	Net weight	6 kg
Number of colours	262.144/16.7 M	Total weight	7.5 kg
LCD Technology	TFT, compensation film	Warranty	3 years SendIT
Display surface	Conductive glasspanel with Antiglare treatment		
On Screen Display	Yes		
On Screen Menu	Autoset, Brightness, Contrast, Picture settings, Colour settings, Miscellaneous		
Pixel size	0.297 mm (H) X 0.297 mm (V)		
Pixel position	RGB vertical stripe		
Frequency range	Horizontal 31.5 k - 60 kHz Vertical 40-75 Hz (XGA)		
Recommended frequency	Vertical 60 Hz, XGA		
Interface	Analog		
Video bandwidth	80 MHz		
Video input	Analog RGB 0.7 Vpp		
Synchronisation	Separate sync		
User controls	Power/Menu, Select, + and -		
Connectors	VGA and power		
Cable lengths	VGA 1.75 m, Power 1,2 m + 1,5 m		
Power management	VESA DPMS		
Power	External power supply Input 100-240 VAC / 50-60 Hz Output 12 VDC, 3.5 Amp.		

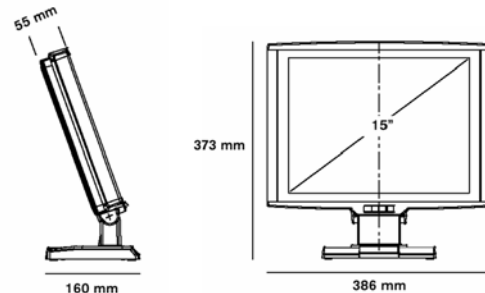

Technical specifications are subject to change without prior notice. PURETECH® is a registered trademark of MultiQ

MultiQ Accessories

In order for you to take full advantage of your MultiQ monitor, we offer a number of accessories. For a full presentation of accessories, visit us at www.multiQ.com

MultiQ Products AB
Ridbanegatan 4
SE-213 77 Malmö
Tel +46 40 14 35 00
Fax +46 40 14 35 01
www.multiQ.se

MultiQ AS
Brobekkveien 80,
Bygg 5
P.O.Box 352, Økern
N-0513 Oslo
Tel +47 2306 7700
Fax +47 2306 7701
www.multiQ.no

MultiQ Products AB
- Vertriebsbüro
Schlachte 39/40
D-28195 Bremen
Tel: +49 421 1769275
Fax: +49 421 1769259
www.multiQ.de

MultiQ UK
Host Europe House
Kendal Avenue
London W3 OXA UK
Phone +44 7871 441162
Fax +44 207 969 3501
www.multiQ.com

multiQ
Custom design flat monito